

OverSized Load Sign Quick Install Instructions (Cross Bar)

1. Move cross bar luggage bars into the approximat position and secure the rear bar. (See vehicles owners' manual for instructions for your specific makes and model.)




2. Mount Pivot Plates using 3/8-16 x 2.0 inch long Stainless Steel bolts and 3/8-16 nuts supplied. Use 2 bolts for each pivot plate. The pivot plates mount on the inside of the frame tube with the pivot bushing oriented outward as shown in the drawing below. (note: the lanyard and pin will be located to the outside as well)



3. Mount the luggage bar brackets to the sign frame using 3/8-16 x 2.0 inch long Stainless Steel bolts and 3/8-16 nuts supplied. Do not tighten yet to allow for adjustment.

Crossbar Mount Sign Frame

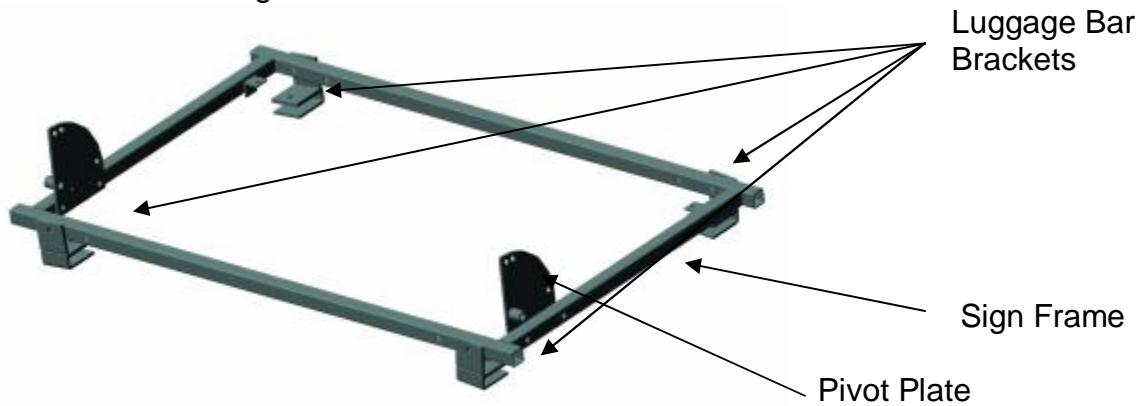

4. Place the sign frame on the luggage rack engaging the rear luggage bar brackets with the rear luggage bar.
5. Adjust the front luggage bar so that it engages the front luggage bar brackets and secure in place
6. Tighten the luggage bar brackets to the frame, and adjust the compression bolt (3/8-16 x 1.00 inch long bolt w/ 3/8-16 jam nut) to secure the luggage rack frame.
7. Mount the sign to the frame and engage the pin in the vertical, the 5 degrees off vertical or the horizontal positions.
8. Mount the optional flag holders to the bottom of the sign as shown.
9. Adjust both luggage bars to final position and secure.

